



Product Components

MAIN BODY DIAGRAM (REAR)

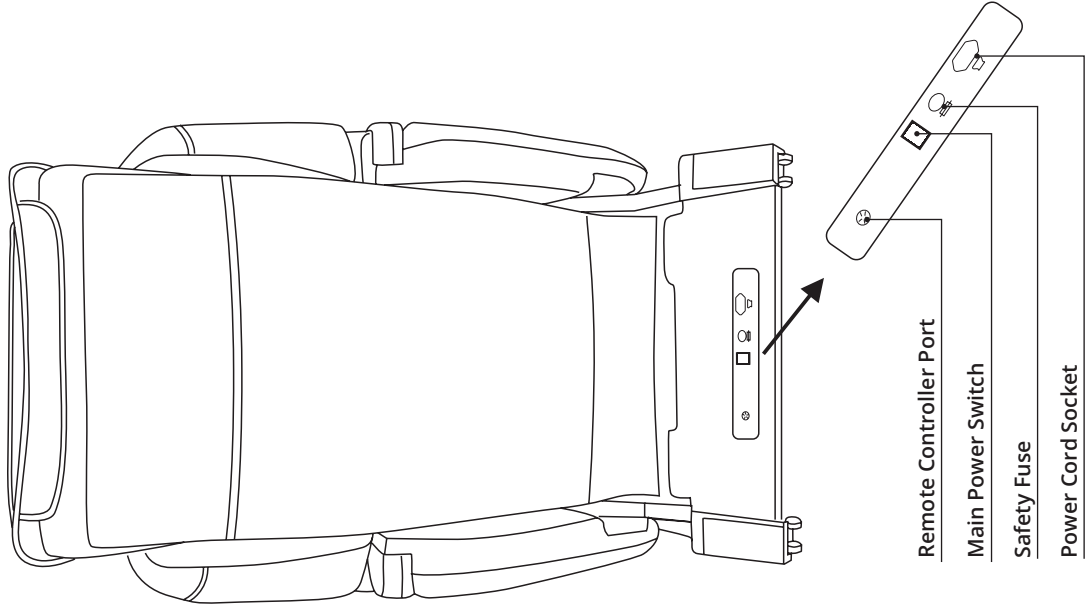


Chair Installation

1. Removing the chair and parts from the package

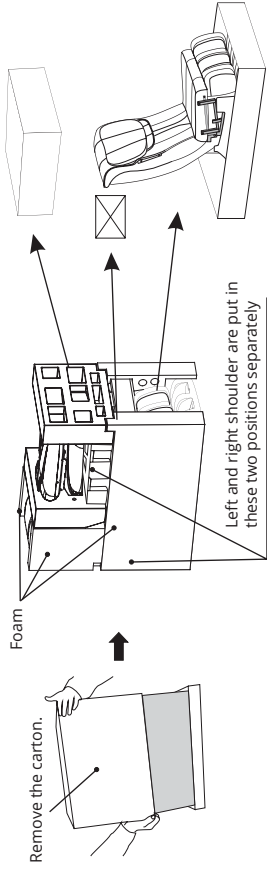

- Lift and remove main outer carton.
- Remove cardboard and foam on both sides of the massage chair.
- Remove accessory box (includes: instructions, power cord etc.).


2. Installing the side panel

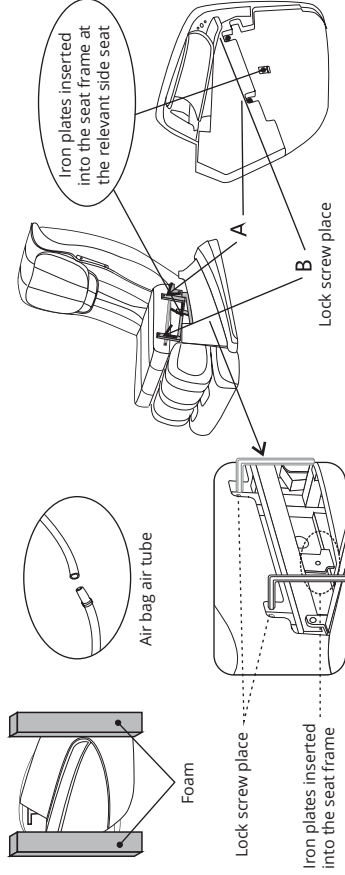

- Remove the side panels from the carton, and take them out to begin assembly.
- Connect the side panel airhose with the airhose coming out of the side of the chair. Both sides of the airhose need to be inserted in order to prevent an air leak and loss of pressure during use.
- Unscrew bolt (B) from the side panel, insert the metal connector plates into the metal pipe which is on the corresponding side of the seat frame (as shown above). At the same time, put the other bolt (A) in the slot on the corresponding seat frame. Then align the holes and screw in bolt (B). Tighten the two screws and repeat this process on both side panels.
- Smooth out the fabric of the chair.


Chair Installation

3. Installing the shoulder airbags

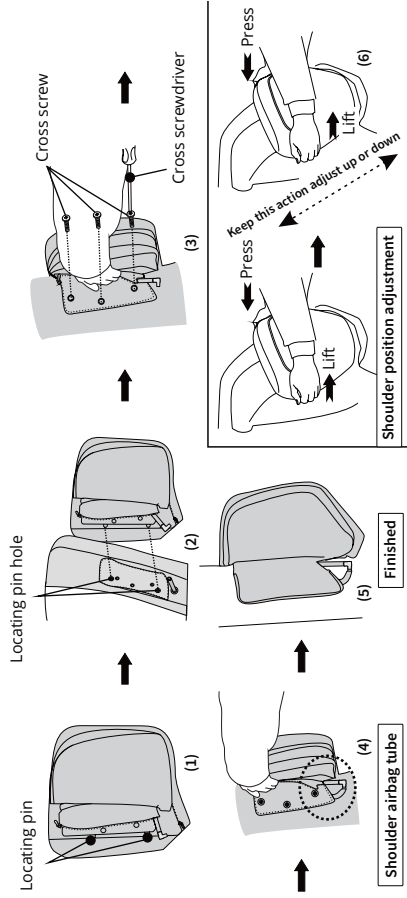

- Unzip the cloth cover for the shoulder airbag components revealing one locating pin and pin hole for each up and down.
- Insert up and down two locating pins into the pin holes on the left side of backrest (as shown). In the screw holes, lock cross screws with the cross screwdriver.
- Insert the air tube joints into air tubes. (Note: They must be inserted completely to prevent air leakage and loss of pressure during use.)
- Zip up the cloth cover.
- Repeat steps a-d on the other side of the chair.
- Adjust the shoulder airbags to fit your shoulder position if needed taking care not to force them into place.


4. Installing the backrest and headrest

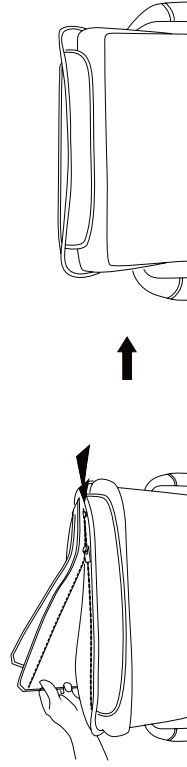

- Use the velcro strips to connect the backrest and cover.
- Smooth out the backrest and seat cushion.


Chair Installation

5. Finding a location for the chair

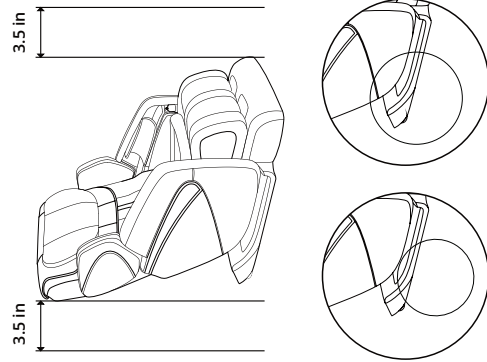

- Place the chair in the desired location and not in direct sunlight.
- Make sure there is at least 3.5 in behind and in front of the chair.

6. Moving the massage chair

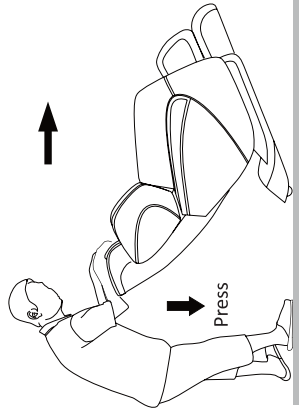

- Press down the back of massage chair to approximately 45° degree angle.
- This will allow it to easily be moved to another location.

CAUTION:

- * Do not move massage chair when occupied or in use.
- * Moving the massage chair may cause damage to floors. Floor protection is recommended.
- * Do not drop or suddenly let go of the chair while moving it.
- * Using two people to move the chair is recommended. The second person should lift up the legrest, while one person holds the backrest